

# Ice Storm

## Manual

USER MANUAL  
**ICESTORM**  
 COOLING CHARGING STAND  
 FOR PS5 PRO/SLIM BLU-RAY/DIGITAL




### Product introduction

Introducing our new multifunctional smart cooling stand, designed to maintain your console at an optimal temperature during intense gaming sessions. This sleek stand features the ability to simultaneously charge two controllers, offering a dedicated space to store 5 game boxes and a console remote, making it a compact hub for all your essential gaming accessories. The fans installed in the stand are highly effective in heat dissipation, ensuring smooth operation of your console. The stand draws power directly from two USB ports. This feature enhances practicality and user convenience, making this cooling stand a valuable addition to your gaming setup.

### Compatible Platforms

New PS5 Pro/Slime Digital and Disc Edition Consoles, PS5 Dualsense Controllers, and PS5 Dualsense Edge Controllers.

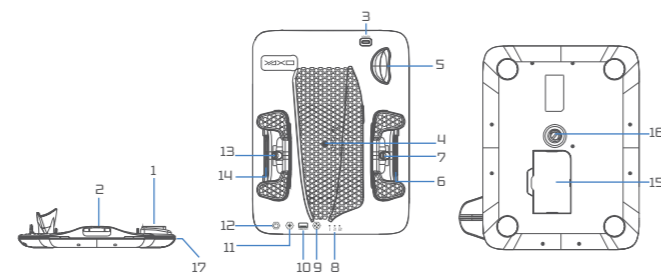


- |   |  |
|---|--|
| 1. LOGO lighting  | 10. USB 2.0 Type-A output port.  |
| 2. Fan exhaust port.  | 11. Lighting control button.   |
| 3. Type-C power and data input.   | 12. Master power button.   |
| 4. Console exhaust vent.  | 13. Magnetic Type-C connector contact slot + Magnetic Type-C male connector. |
| 5. Remote storage base + lighting.  | 14. Gamepad charging status light.   |
| 6. Gamepad charging status light.   | 15. Removable disc tray box.   |
| 7. Magnetic Type-C connector contact slot + Magnetic Type-C male connector. | 16. Hand-tightened console screw.  |
| 8. Fan speed indicator light.   | 17. Lighting assembly.   |
| 9. Fan control button.  |  |

### Electrical Parameters and Functions

Type-C port input: DC 5V/3A (MAX).
USB-A port output: DC 5V/1A (MAX).
Cooling fan working voltage/current: 0.1A (MAX).
Cooling fan speed: 5000 RPM (MAX).
PS5 game controller charging current: 0.5A * 2.
PS5 game controller charging voltage: DC 5V.
Magnetic Type-C connector contact slot output voltage: DC 5V * 2.
Magnetic Type-C connector contact slot output current: Up to 1A (MAX) * 2.
Single Full Charge Time For PS5 DualSense Controller: 4 hours.
Single Full Charge Time for PS5 DualSense Edge Controller: 3 hours.
Length of Dual-Head USB A Male to Type-C Data Cable: 240mm.
Number of Disc Slots on Disc Rack: 5.
Power Supply Method: USB A Port on the back of the PS5 console.

- Charging Protection: Overcurrent, Overvoltage, Short Circuit (except for USB 2.0 A port). In the above situations, all lights (ambient lights, controller indicators, fan indicators) will flash red. You can resolve this issue by turning off and then turning on the master power button again. However, if overcurrent, overvoltage, or short circuit issues persist, the red lights will continue to flash.
- The product defaults to high-speed fan operation when powered on.
- When the product is powered on, the lighting system activates, starting from the color it had before the last shutdown or power-off, thanks to its memory function.

### Controller Charging Status Light

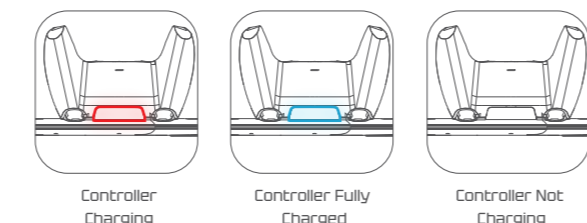

### Fan Indicator Light

Short press of the button	
Long press for 3s	Long press for 3s again
Fan Off, No Light	Fan On, Corresponding Gear Blue Light On

### Ambient Lighting

Short press of the button	Long press for 3s	Long press for 3s again
Red → Blue → Green → Yellow → Pink	Light off	Light on
→ White → Breathing Rainbow Light		

### Master Power Switch

Short press of the button	Short press again
Turn off all power	Turn on all power

### Usage Notes

- Do not cover the fan exhaust port and the console exhaust vent with clothing, plastic bags, or any other items.
- When the PS5 console is not in use, please remember to turn off the fan cooling switch to extend the fan's lifespan.
- Do not use the product in humid or high-temperature environments.
- Do not modify or disassemble the product.
- If there is dirt or debris on the charging pins of the base after extended use, clean them with a cloth to ensure proper charging contact.

### Assembly Diagram for Use

